




PROPOSED CARRIAGEWAY OVERLAY

DETAIL D

Scale 1:25

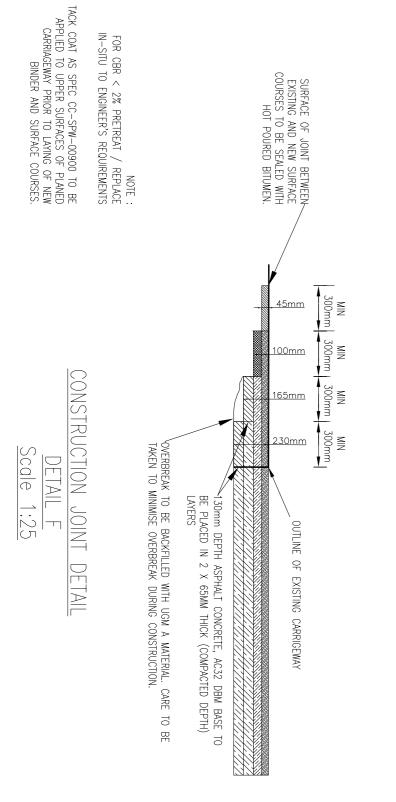

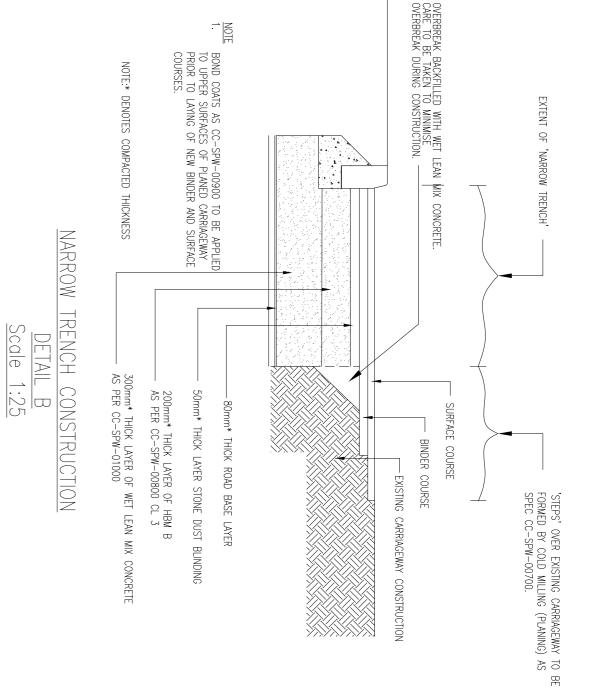

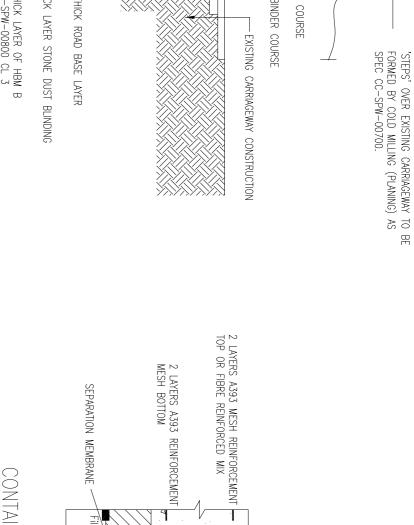


320mm THK. C40/50 CONCRETE.
Refer to Specification Series 1700

320

CONTAINER RIGID SURFACING

DETAIL C

Scale 1:25 STORAGE HEAVY DUTY

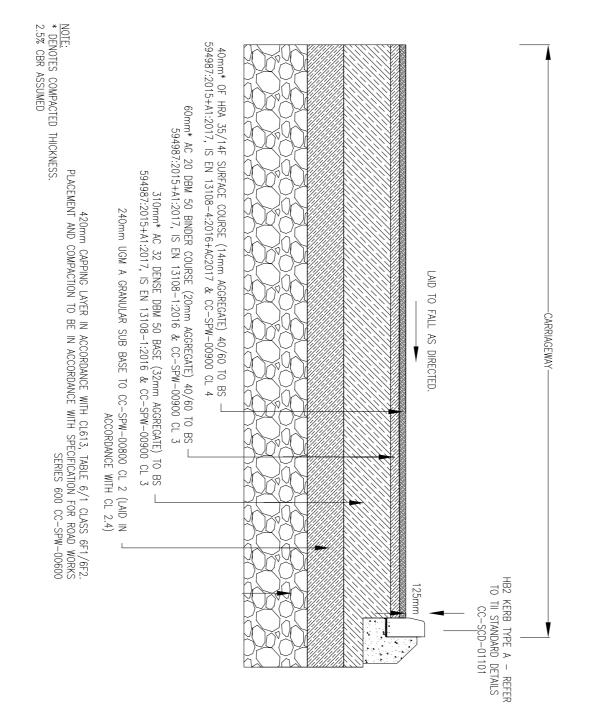



PROPOSED CARRIAGEWAY CONSTRUCTION

(T10 LINK ROAD SOUTH)

DETAIL E

Scale 1:25

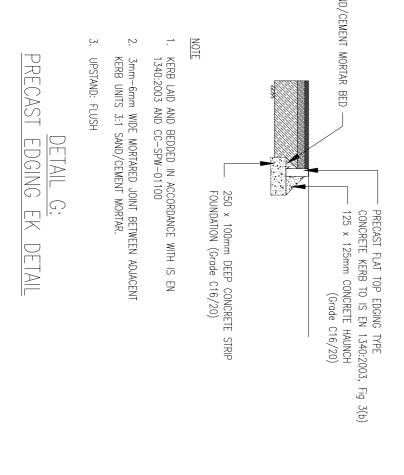

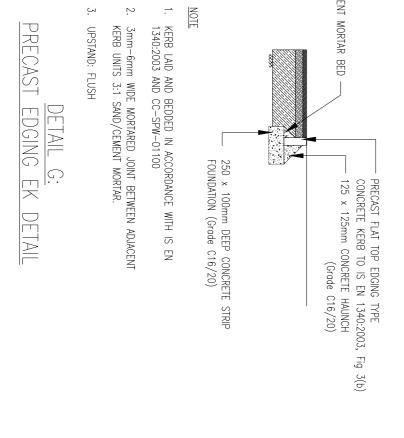

NOTES Verifying Dimensions.

The contractor shall verify dimensions against such other site conditions as pertain to this part of the work.

2. Existing Services.
Any information concerning the location of existing services indicated on this drawing is intended for general guidance only. It shall be the responsibility of the contractor to determine and verify the exact horizontal and vertical alignment of all cables, pipes, etc. (both underground and overhead) before work commences.

3. Issue of Drawings.

Hard copies, dwf and pdf will form a controlled issue of the drawing. All other formats (dwg, dxf etc.) are deemed to be an uncontrolled issue and any work carried out based on these files is at the recipients own risk. RPS will not accept any responsibility for any errors arising from the use of these files, either by human error by the recipient, listing of un-dimensioned measurements, compatibility issues with the recipient's software, and any errors arising when these files are used to aid the recipients drawing production, or setting out on site.

Datum. ITM

150 The make-ups shown may be subject to revision at detailed design stage based on actual CBRs encountered at site specific locations.

rev amendments check date

G
Elmwood House 74 Boucher Road Belfast BT12 6RZ
ш≷л⊣
+44 (0) 28 90 667914 +44 (0) 28 90 668286 www.rpsgroup.com/i ireland@rpsgroup.com

COMHLACHT CHALAFORT ÁTHA CLIATH
DUBLIN PORT COMPANY

**3FM**Project Bringing Dublin Port To 2040

Roads & Footways (Northern) Proposed Construction Details

Drawing Number CP1901\_3FM-RPS\_ IBH0796 \_S26-HGN-NP-DR-C-100-0001 <u>≥</u> Drawing Scale As Shown

Drawn By JG Checked By PN Approved By CDo Dec 2022