


NOTES

- 1. Verifying Dimensions**
The contractor shall verify dimensions against such other drawings or site conditions as pertain to this part of the work.
- 2. Existing Services**
Any information concerning the location of existing services indicated on this drawing is intended for general guidance only. It shall be the responsibility of the contractor to determine and verify the exact horizontal and vertical alignment of all cables, pipes, etc. (both underground and overhead) before work commences.
- 3. Issue of Drawings**
Hard copies, AWT and PDF will form a controlled issue of the drawing. All other formats (dwg, pdf etc.) are deemed to be an uncontrolled issue and any work carried out based on these files is at the recipient's own risk. All of these files, along with any amendments to the original, along with any unredacted measurements, compatibility issues with the recipient's software, and any errors arising when these files are used to aid the recipient's drawing production, or setting out on site.
- 4. OS Map Sheet No**
3198-13, 3198-14, 3198-15, 3198-18, 3198-19, 3198-20, 3198-23, 3198-24, 3198-25, 3264-03, 3264-04, 3264-05, 3264-06, 3264-09, 3264-10, 3264-13, 3264-14, 3264-15, 3264-18, 3264-19, 3264-20, 3199-11, 3199-12, 3199-13, 3199-14, 3199-15, 3199-16, 3199-17, 3199-18, 3199-19, 3199-21, 3199-22, 3199-23, 3199-24, 3265-01, 3265-02, 3265-03, 3265-04, 3265-05, 3265-07, 3265-08, 3265-09, 3265-10, 3265-11, 3265-12, 3265-16
- 5. Datum: T.M**

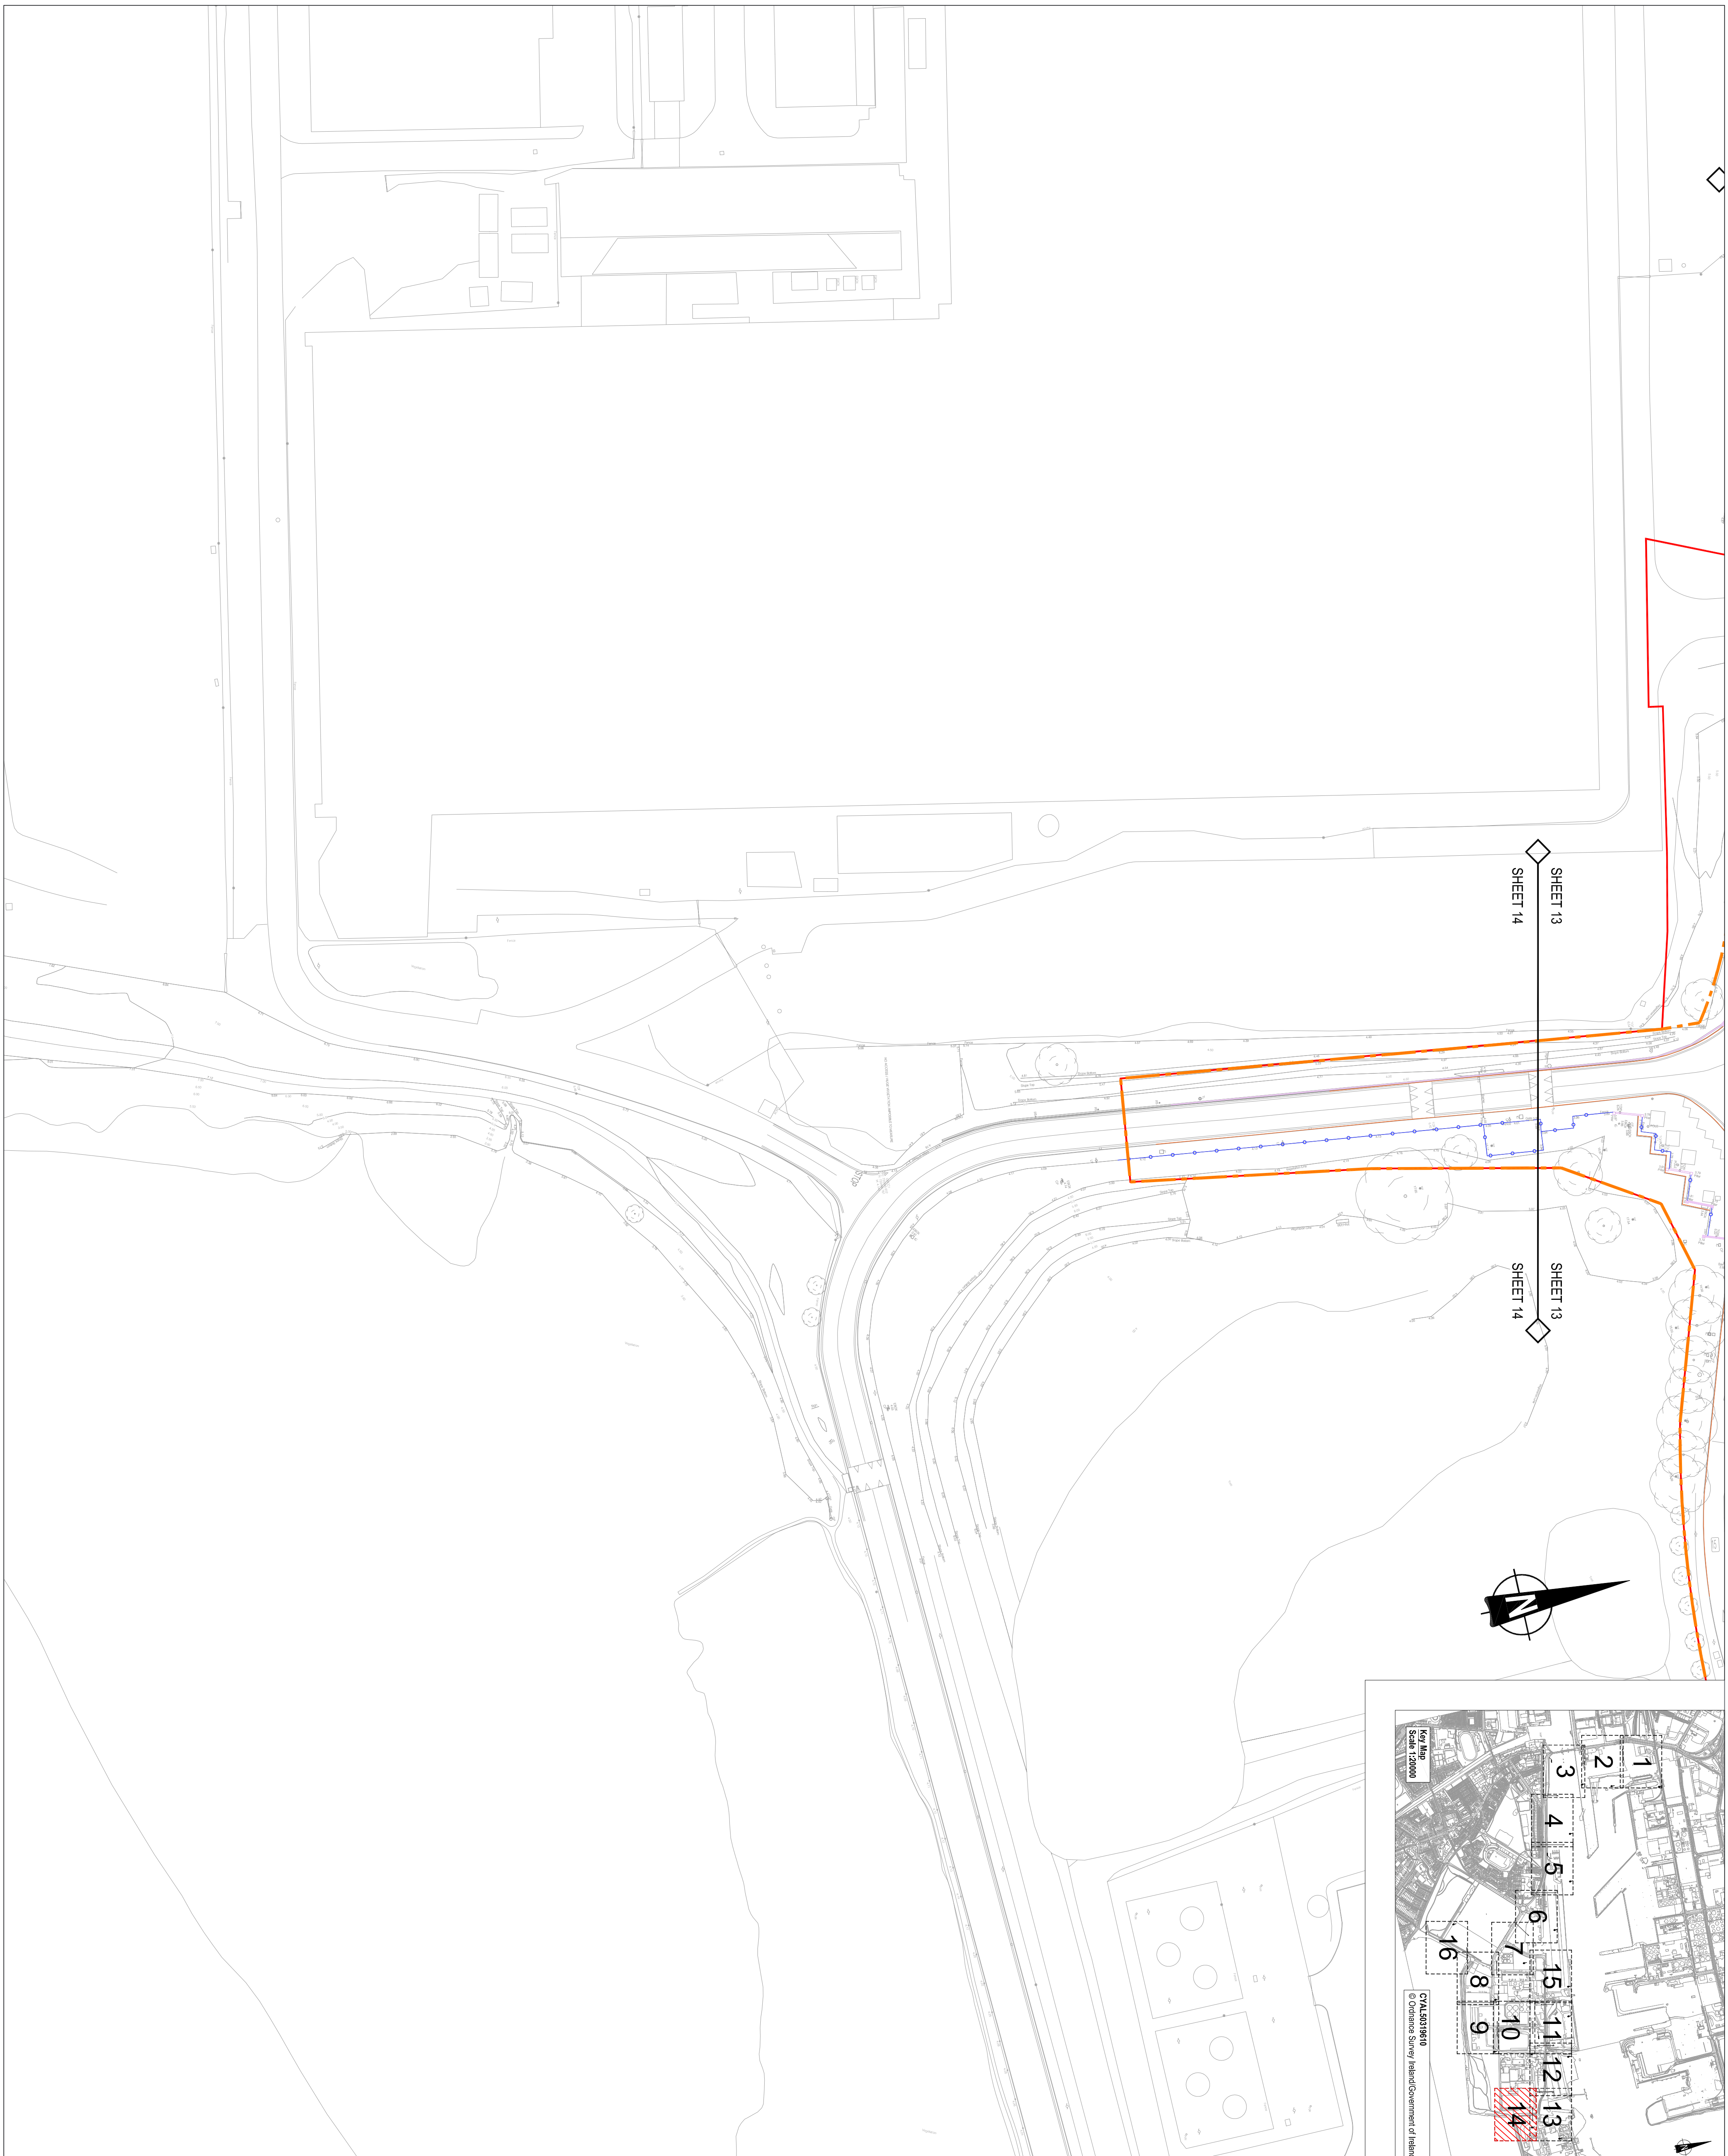

Project		3FMProject Engineering To 2510	
Title Roads & Footways (Southern & SPAR) - Site Clearance Sheet 14 of 16			
Project Number	IBH0796	Sheet Size	A1
Drawing Number	CP1901_3FM-RPS_S26-HML-XX-DR-FE-200-0014	Drawing Scale	1:500
Drawn By	DMI	Status	S4
Checked By	PN	Revision	P01
Approved By	CDO	Date	Dec 2022

Client
CONHLAIGHT CHALAFORT
DUBLIN PORT COMPANY

RPS
74 Boucher Road
Belfast
BT12 6NZ
T +44 (0) 28 90 667914
F +44 (0) 28 90 662285
W www.rpsgroup.com/ireland
E ireland@rpsgroup.com

rev	amendments	PN	check	date
P01	Revised for planning	PN		02/10/23

	General site clearance boundary
	Application Boundary
	Existing kerbing broken out and removed offsite
	Existing fencing is to be taken down and removed offsite
	Existing safety barrier is to be taken down and removed offsite
	Existing wall / retaining wall is to be demolished and removed offsite
	Existing gate is to be taken down and removed offsite
	Existing trees are to be dug up and removed offsite
	Existing shrubbery is to be dug up and removed offsite
	Existing building is to be demolished and removed offsite
	Existing storage / tanks are to be demolished and removed offsite
	Existing lighting columns are to be taken down and removed offsite
	Existing gullies are to be abandoned
	Existing flood light is to be taken down and removed offsite
	Existing camera is to be taken down and removed offsite
	Existing structures are to be demolished and removed offsite (steps / ramps)
	Existing guardrail is to be taken down and removed offsite
	Existing signal pole is to be taken down and removed offsite
	Existing bollard is to be taken down and removed offsite
	Existing signage is to be taken down and removed offsite