


SHEET 8
SHEET 16
SHEET 8
SHEET 16

NOTES

1. Verifying Dimensions: The contractor shall verify dimensions against such other drawings or site conditions as pertain to this part of the work.
2. Existing Services: Any information concerning the location of existing services indicated on this drawing is intended for general guidance only. It shall be the responsibility of the contractor to determine and verify the exact horizontal and vertical alignment of all cables, pipes, etc. (both underground and overhead) before work commences.
3. Issue of Drawings: Hard copies, AWT and PDF will form a controlled issue of the drawing. All other formats (dwg, pdf etc.) are deemed to be an uncontrolled issue and any work carried out based on these files is at the recipient's own risk. All files shall be submitted to the engineer for approval. All files of these files shall be submitted to the engineer. All files of un-dimensioned measurements, compatibility issues with the recipient's software, and any errors arising when these files are used to aid the recipient's drawing production, or setting out on site.
4. OS Map Sheet No
3198-13, 3198-14, 3198-15, 3198-18, 3198-19, 3198-20, 3198-23, 3198-24, 3198-25, 3264-03, 3264-04, 3264-05, 3264-08, 3264-09, 3264-10, 3264-13, 3264-14, 3264-15, 3264-18, 3264-19, 3264-20, 3199-11, 3199-12, 3199-13, 3199-14, 3199-15, 3199-16, 3199-17, 3199-18, 3199-19, 3199-21, 3199-22, 3199-23, 3199-24, 3265-01, 3265-02, 3265-03, 3265-04, 3265-06, 3265-07, 3265-08, 3265-09, 3265-10, 3265-11, 3265-12, 3265-16
5. Datum: T.M

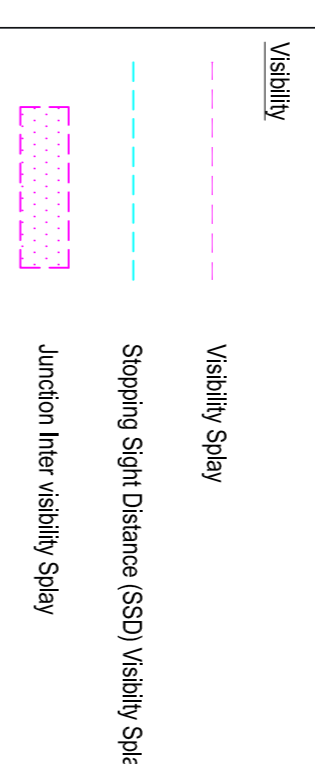

P02	Revised for planning submission	JF	25/06/24
P01	Updated for RSA	PN	Aug 23
rev	amendments	check	date

RPS
 Elmwood House T +44 (0) 28 90 667914
 74 Boulder Road F +44 (0) 28 90 662285
 Belfast W www.rpsgroup.com/ireland
 BT12 6XZ E rps@rps.com

CONHLAIGHT CHALAFORT
ATHA CLAIH
DUBLIN PORT COMPANY

3FMProject
 Building
 To 2500

Project
Roads & Footways (Southern & SPAR) - Proposed Road Markings and Visibility Sheet 16

Project Number	Sheet Size	Drawing Scale
IBH0796	A1	1:500

Drawing Number
CP1901_3FM-RPS_S26-HMK-XX-DR-FE-100-0016

Drawn By	Status	Revision
PN	S4	P02
Checked By	Approved By	Date
PN	CDO	May 2023

- KEY TO ROAD MARKINGS**
 Road markings details to comply with the 'Traffic signs manual Chapter 7 (Republic of Ireland)' and subsequent amending regulations. Diagram numbers are referenced to this document. Road markings shall be in thermoplastic screed with applied solid glass beads.
- The removal of all superseded road markings within the site boundary shall be carried out to the satisfaction of the engineer. All road markings are subject to the approval of a representative of National Roads Authority at the time of application.
- Road Markings:**
1. DKSRAV RRM 017:- Stop Line - 200mm wide continuous line; Colour white.
 2. DKSRAV M 114:- Widened STOP marking - 1600mm high; Colour white.
 3. DKSRAV RRM 027:- Edge of carriageway Line - 150mm wide continuous line; Colour white.
 4. DKSRAV RRM 021:- Figure 7.16: Hatched Marking - 2 no. 100mm continuous boundary lines, 150mm hatching lines spaced at 300mm apart; Colour white.
 5. DKSRAV RRM 028:- Centre Line - 100mm wide line; 3000mm long mark, 3000mm long gap; Colour white.
 6. DKSRAV RRM 020Z:- Hazard Warning Line - 100mm wide line; 3000mm long mark, 1000mm long gap; Colour white.
 7. DKSRAV RRM 033A:- Centre Line for vehicle proceeding in the same direction - 100mm wide line; 4000mm long mark, 8000mm long gap; Colour white.
 8. DKSRAV RRM 038:- Centre Line for vehicle proceeding in the same direction on approach to junction/roundabout - 100mm wide line; 2000mm long mark, 2000mm long gap; Colour white.
 9. DKSRAV RRM 001:- Carriageway Line - 100mm Continuous single line; Colour White
 10. DKSRAV M 025:- Biturdon Arrow - 8000mm Long Arrow; Colour white.
 11. DKSRAV RRM 005:- Lane direction arrow (left) - 3600mm long arrow; Colour White
 12. DKSRAV RRM 006:- Lane direction arrow (right) - 3600mm long arrow; Colour White
 13. DKSRAV RRM 004:- Lane direction arrow (Straight) - 3600mm long arrow; Colour White
 14. DKSRAV M 124:- Lane direction arrow (Straight and Left) - 3600mm long arrow; Colour White
 15. DKSRAV M 125:- Lane direction arrow (Straight and Right) - 3600mm long arrow; Colour White
 16. DKSRAV RRC 002:- Zig Zag Marking - 8 no. 100mm continuous wide lines, 2000mm long, @ 500mm diagonal width. At the end of the Zigzags Markings remote from the crossing, a transverse Terminal Line, 600mm long by 200mm wide, shall be provided.
 17. DKSRAV M 131:- Pedestrian crossing Line; 2 no. 100mm Continuous single line; Colour White
 18. DKSRAV RRM 020:- Yellow box markings: Extends across the full width of the carriageway at a road junction; 200mm wide boundary, 150mm wide line height; 2000mm spacing
 19. DKSRAV M 115:- Triangular yield marking - 1250mm wide x 3750mm long; Colour white.
 20. DKSRAV RRM 018:- Yield Line - 1 No. 200mm wide line; 1000mm long mark, 1000mm long gap; Colour white.
 21. DKSRAV RRM 019:- No Entry Line - 1 No. 200mm wide, continuous line at junction and 1 broken line 200mm wide 1000mm long strip, 1000mm gap with 300mm between the two lines; Colour white.
 22. DKSRAV RRM 023:- Cycle Carriageway Line - 100mm wide line; 750mm long mark, 750mm long gap; Colour white.
 23. DKSRAV M 116:- Cycle symbol - 1 No. 2750mm high x 1700mm wide symbol; Colour white
 24. DKSRAV RRM 021:- Figure 7.16: Chevron Hatched Marking - 2 no. 100mm continuous boundary lines, 200mm hatching lines spaced at 300mm apart; Colour white.
 25. DKSRAV RRM 022:- Cycle Edge Line - 100mm wide continuous line; Colour white.
 26. Stainless steel studs.
 27. DKSRAV RRM 008:- Parked Restrictions (Double Yellow Line); 2 no. 100mm wide continuous lines, spaced at 100mm apart; Colour yellow.
 28. DKSRAV M 112:- Traffic Calming Triangles - 750mm wide triangle from base of hump or cushion, max length of 1850mm; Colour white.